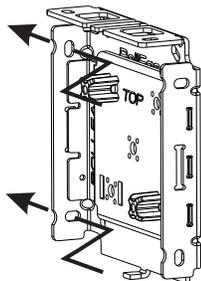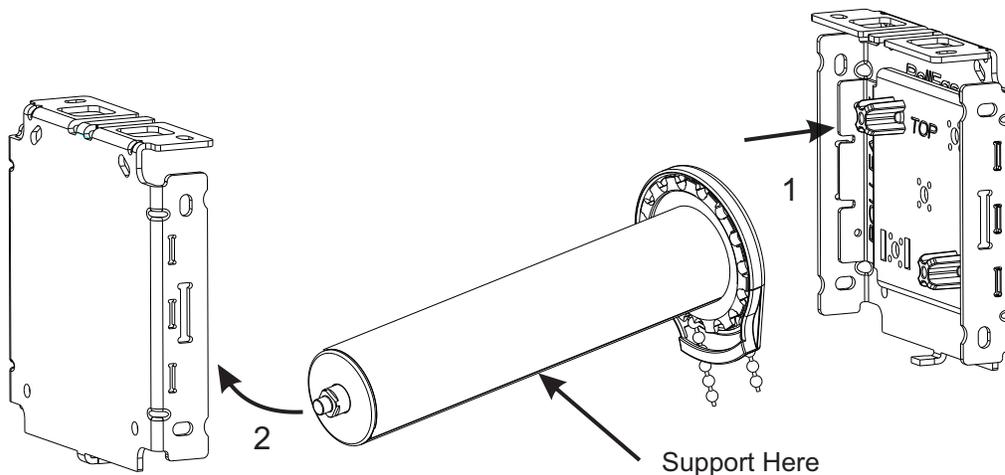# R Series Dual 5" Fascia Installation instructions

Outside or Open Wall Mount

1. Install brackets as required using proper anchors and fasteners.


2. Install the shades beginning with the one in the upper position. With each shade, install the clutch end first, and then the idler side. Be certain to support the clutch end of the shade as the idler end is installed. The shades should not be supported by the clutch alone as this could cause damage to the clutch. The installation team should support the shade as it is being completely seated into the bracket set.
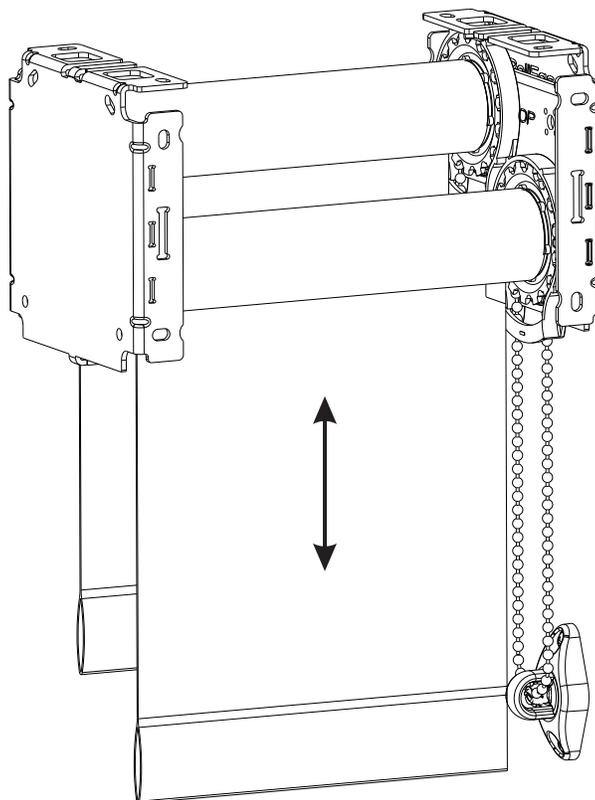

Support Here

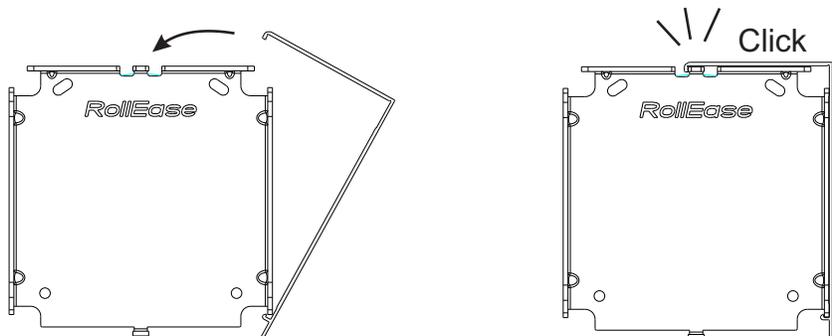3. Chain tension devices should be carefully and properly installed.

4.Lower and raise the shades to confirm smooth operation including proper setting of the stops. Confirm control chains are routed properly. Check before and after installing tension devices.
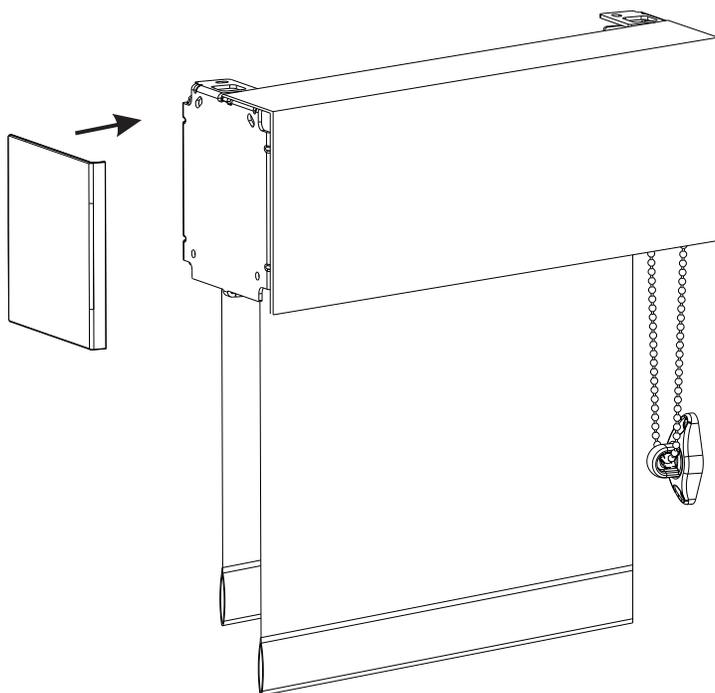
5. Attach the fascia by hooking the lip of the long side of the fascia panel onto the bottom front tab of the bracket. Swing the fascia panel up over the bracket and firmly press the lip of the short side of the panel until the fascia engages the center top tab of the bracket.
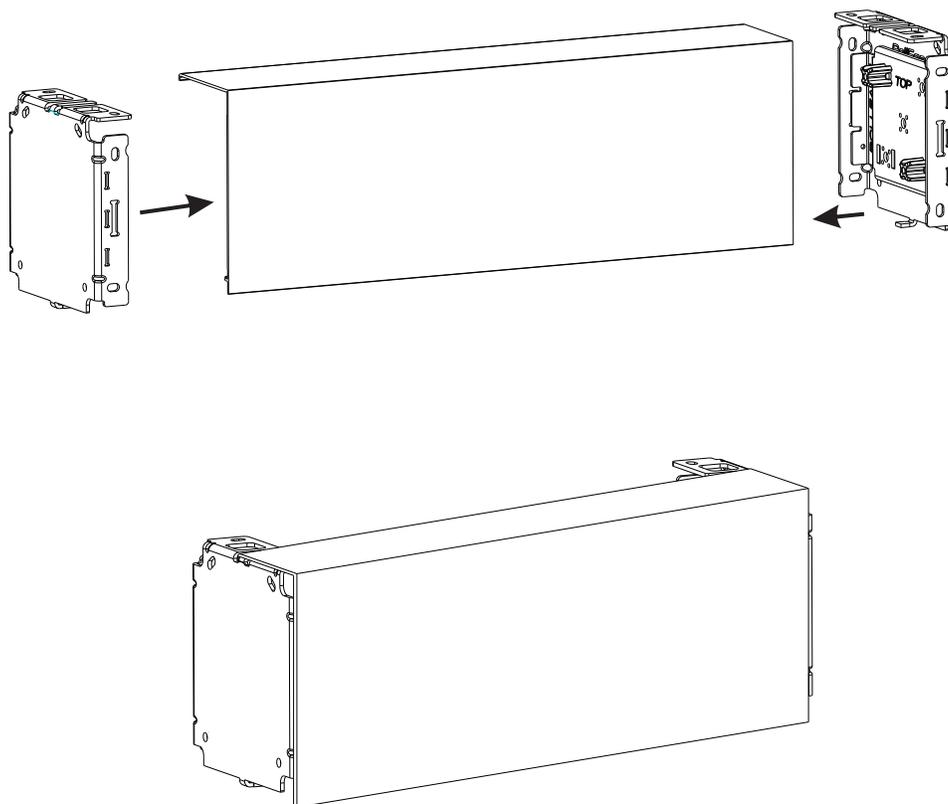
Click

6. If using end caps, snap end caps over brackets and fascia.

R Series Dual 5" Fascia Installation instructions
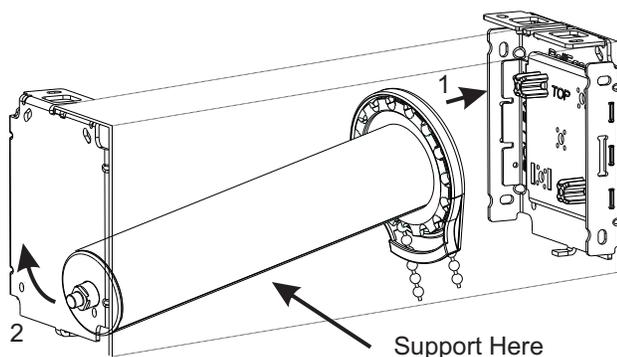
Ceiling, Inside, or partial-Inside Mount

1. For installation of dual shades with ceiling, inside, or partial-inside mount, the brackets and fascia must be pre-assembled before the brackets are mounted. This is a requirement of the system until the flat panel fascia can be introduced.

2. Assemble fascia to the brackets at each end. The fascia/bracket assembly is then installed into the desired location. If ceiling mounting, the overhead screws are driven through the fascia panel. For inside or partial-inside, use available screw holes. Once the fascia/bracket set is securely fastened in place, install the shades beginning with the one in the upper position.
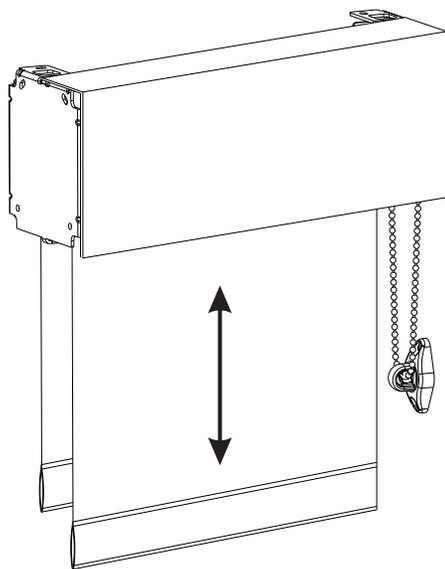
3. With each shade, install the clutch end first and then the idler end. Be certain to support clutch end of the shade as the idler end is installed. The shades should not be supported by the clutch alone as this could cause damage to the clutch. The installation team should support the shade as it is being completely seated into the bracket set.


Support Here

4. Lower and raise the shades to confirm smooth operation including proper setting of stops. Check before and after installing tension devices.

© RollEase, Inc.

5. Chain tension devices should be carefully and properly installed.

6. If using end caps, snap end caps over brackets and fascia.